


DD-PT2.5/3-D

RoHS
Compliant

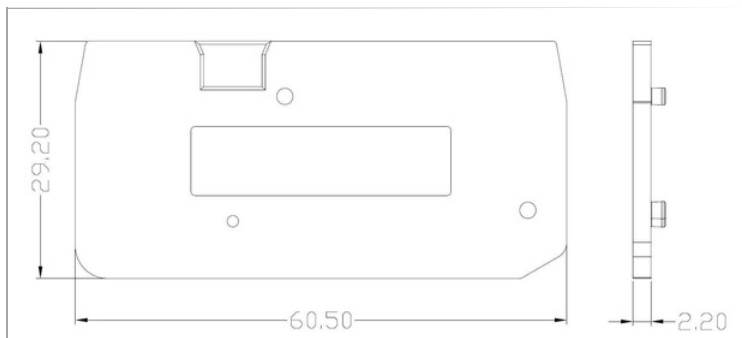

Product Description

Key Commercial Data

| | |
|--------------------------------------|-------|
| Packing unit | 1 PCS |
| MOQ Minimum order quantity | 50PCS |
| Weight per Piece (excluding packing) | 2.46g |
| Country of origin | CN |

Material information

| | |
|---|--------|
| Insulating material | PA66 |
| UL 94 Flammability rating according to UL | V0 |
| Color | |
| Continuous operating temp., max. | 105 °C |
| Continuous operating temp., min. | -40 °C |

Dimensions

| | |
|--------|---------|
| Width | 2.20mm |
| Length | 60.50mm |
| Height | 29.20mm |

General information

| | |
|--------------------------------|----------|
| Terminal Blocks of application | DPT2.5/3 |
|--------------------------------|----------|