


# CBI60024A

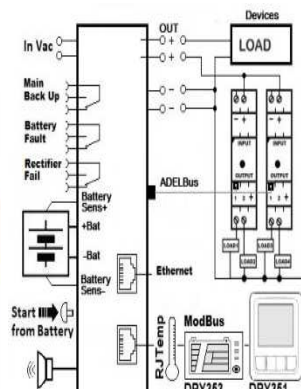

**Input:** Single-phase 115 – 277 Vac; 600W

**Output Load:** power supply 24 Vdc; 20 A – (25A max)

**Output Battery:** charging 24 Vdc; 20 A

**Suited for the following battery types:** Open Lead Acid, Sealed Lead Acid, lead Gel and Ni-Cd

**Automatic diagnostic of battery status.**

**Charging curve IUoU, constant voltage and constant current**

**Battery Life Test function (Battery Care)**

**Switching technology Four charging levels: Recovery, Bulk, Absorption, Boost, and Float**

**Protected against short circuit and inverted Batt. polarity**

**Signal output (contact free) for discharged or damaged battery**

**Signal output (contact free) for Mains or Back-UP**

**Modbus RTU for all parameter, Battery and System**

**Ethernet: SNMP V3, Modbus TCP/IP, HTTPS**

**Protection degree IP20 - DIN rail; Space saving**


New revolutionary product, with Ethernet on board provided with protocol connections: HTTP, HTTPS, SNMPv1/2c/3, Modbus TCP/IP. The device also features the ADELBus protocol for connecting other ADELSYSTEM devices.

**Power Management:** Thanks to the All In One units (DC-UPS), it will be possible to optimize power management. The available power is automatically allocated between load and battery, supplying power to the load is the first priority of the unit, therefore it is not necessary to double the power, because also the power going to the battery will go to the load if the load so requires. The maximum available current on the load output is 3 times the value of the device rated current  $I_n$ .

**Battery Care:** it is the concept based on algorithms that implement rapid and automatic charging, four charge phases, battery charge optimization during time, flat batteries recovery and real time diagnostic during installation and operation. The Real Time Auto-diagnostic system monitors battery faults such as sulfated or shorted battery elements, reverse polarity connection, disconnection of the battery; such faults can be easily detected and removed with the help of Diagnostic Blink Codes or through web server. The continuous monitoring of battery efficiency reduces battery damage risk and allows a safe operation in permanent connection. Each device is suited for all battery types, by means of manual configuration by push button or web server it is possible to set predefined curves for Open Lead Acid, Sealed Lead Acid, Gel, Ni-Cd (option). Five charging levels are pre-programmed (recovery, boost, bulk, absorption, float / trickle charge), but they can be changed by the user. With a rugged casing for DIN rail mounting, IP20 protection degree, the product is extremely compact and cost effective.

**Interconnections:** The platform communication for ADELSYSTEM devices allows the connection of all components in a simple but very powerful way via Ethernet. Communication is based on various protocol: Modbus TCP/IP, SNMP or HTTP/HTTPS, depending on your application. The CANOpen-based ADELBus allows to communicate with all the accessories provided by ADELSYSTEM and to develop an independent system for electrical continuity. At the same time, it allows monitoring and control all parameters in the system, even from the other side of the world, by means of application tools on the cloud. ADELSYSTEM allows you to implement very simple but sophisticated monitoring and control for your energy system and opens your mind to new ways to approach your applications.

**Norms and Certifications:** The CE mark in conformity to EMC 2014/30/EU: Electromagnetic Compatibility Directive; 2014/35/EU: Low Voltage Directive; ROHS 2011/65/EU: Restriction of the use of certain Hazardous Substances in Electrical and Electronic Equipment (RoHS), as amended by 2015/863/EU. EMC Immunity: EN61000-6-2; EMC Emission: EN61000-6-3. According to: Electrical Equipment for Machinery EN 60204; Electrical safety (of information technology equipment) IEC/EN 62368-1.

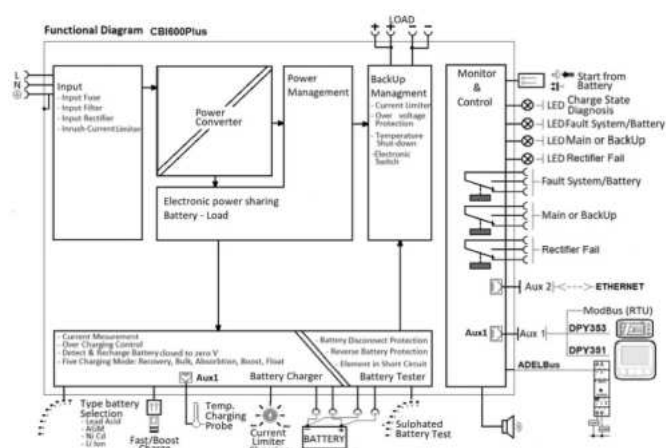

## Climatic Data

|                                             |                     |
|---------------------------------------------|---------------------|
| Ambient temperature (operation)             | -25 ÷ +70°C         |
| De Rating $T_a > 50^\circ\text{C}$          | - 2.5%(In) / °C     |
| Ambient temperature Storage                 | -40 ÷ +85°C         |
| Humidity at 25 °C no condensation           | 95% to 25°C         |
| Altitude: 0 to 2 000m - 0 to 6 560ft        | No restrictions     |
| Altitude: 2 000 to 6 000m-6 560 to 20 000ft | De-rating 5°C/1000m |
| Cooling                                     | Auto convention     |

## General Data

|                                                                                        |                  |
|----------------------------------------------------------------------------------------|------------------|
| Insulation voltage (IN/OUT)                                                            | 3000 Vac         |
| Insulation voltage (Input / Earth, PE)                                                 | 2000 Vac         |
| Insulation voltage (Out Load & Battery / Earth, PE)                                    | 500 Vac          |
| Insulation voltage (Out Load, Battery, Aux2 / Fault System & Main or Back Up terminal) | 500 Vac          |
| Protection Class (EN/IEC 60529)                                                        | IP20             |
| Reliability: MTBF IEC 61709                                                            | > 300.000 h      |
| Pollution Degree Environment                                                           | 2                |
| Connect Terminal Blocks screw Type Signal                                              | 2,5mm(24-14AWG)  |
| Connect Terminal Blocks screw Type Power                                               | 4 mm (30-10 AWG) |
| Protection class (PE Connected)                                                        | I, with PE       |
| Dimensions (w-h-d)                                                                     | 150x115x135 mm   |
| Weight                                                                                 | 1.55 kg approx.  |

## Input Data

|                                             |                                     |
|---------------------------------------------|-------------------------------------|
| Nominal Input Voltage                       | 115-230 Vac<br>(277Vac operational) |
| Voltage range                               | 90 – 135 : 180 – 305                |
| Power Factor typ. (115 – 230 Vac)           | 0.6 – 0.5                           |
| Input Inrush Current Limiter                | NTC                                 |
| Inrush Current ( $V_n - I_n$ nom. Load) I2t | ≤ 35 A ≤ 5 msec.                    |
| Frequency                                   | 47 ÷ 63 Hz                          |
| Input Current (115 – 230 Vac)               | 9 – 4.5 A                           |

|                                         |      |
|-----------------------------------------|------|
| Internal fuse (not replaceable)         | 10 A |
| External Fuse (recommended) MCB curve B | 16 A |

#### Output Data (internal power supply)


|                                                         |                       |
|---------------------------------------------------------|-----------------------|
| Output Voltage (Vn) / Nominal Current (I <sub>n</sub> ) | 24 Vdc                |
| Output Current I <sub>n</sub> = I <sub>load</sub>       | 20 A                  |
| Efficiency (at 50% of rated current)                    | ≥ 91 %                |
| Residual Ripple                                         | ≤ 80 mV <sub>pp</sub> |
| Turn-On delay after applying mains voltage              | 1 sec. (max)          |
| Start up with Strong Load (capacitive load)             | Yes, Unlimited        |
| Dissipation power load max (W)                          | 48                    |
| Short-circuit protection (max current)                  | Yes (70 A)            |
| Over Load protection (max current)                      | Yes (60 A)            |
| Over Voltage Output protection                          | Yes (typ. 35 Vdc)     |
| Overheating Thermal protection                          | Yes                   |

#### Load Output

|                                                                                          |                                |
|------------------------------------------------------------------------------------------|--------------------------------|
| Output voltage Vdc (at I <sub>n</sub> )                                                  | 22 - 28.8 V (31 Ni-Cd)         |
| Nominal current I <sub>load</sub>                                                        | 1.1 x I <sub>n</sub> A ± 5%    |
| Continuous current (Without battery) I <sub>load</sub> = I <sub>n</sub>                  | 20 A                           |
| Power boost (Without battery, 4 minutes)                                                 | 25 A                           |
| Continuous current (With battery) I <sub>load</sub> = I <sub>n</sub> + I <sub>batt</sub> | 40 A                           |
| Max. current Output Load (Main) I <sub>load</sub> (4 sec.)                               | 60 A max.                      |
| Max. current Output Load (Back Up)                                                       | 40 A max.                      |
| I <sub>load</sub> (4 sec.)                                                               |                                |
| Start From Battery Without Main (Remote Input Control)                                   | External Contact Push Button   |
| Time Buffering; min (switch output off without main input)                               | 0.5;2;5;10;15; 20; 30; 45;60;∞ |

#### Battery Charge

|                                                      |                                           |
|------------------------------------------------------|-------------------------------------------|
| Output Voltage Battery                               | Follow the Out Load                       |
| Boost/Fast charge Jumper Config. 25°C (V/cell).      | Lead Acid: 2.4<br>NiCd:1.51; Li-ion: 3.65 |
| Float Charge Jumper Configuration 25°C (V/cell)      | Lead Acid: 2.23; 2.25;<br>2.27;2.3        |
| Jumper Configuration battery type                    | NiCd:1.4; Li-ion: 3.45                    |
| Max.Time Boost–Bulk charge (Typ. at I <sub>N</sub> ) | 15 h                                      |
| Min.Time Boost–Bulk charge (Typ. at I <sub>N</sub> ) | 1 min.                                    |
| Recovery Charge                                      | 2 – 20 Vdc                                |
| Charging current max I <sub>batt</sub>               | 25 A ± 5%                                 |
| Charging current limiting I <sub>adj</sub>           | 10 ÷ 100 % / I <sub>bat</sub>             |
| Reverse battery protection                           | Yes                                       |
| Quiescent Current max.                               | ≤ 100 mA                                  |
| Charging Curve automatic: IUoU                       | 5 stage                                   |
| Remote Input Control (RTCONN cable)                  | Boost / Float                             |
| Battery charge temperature compensated.              | RJTemp 451N or 453N                       |
| External probe                                       | Aux1                                      |

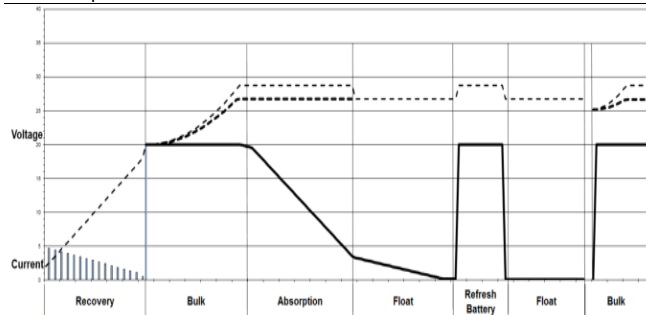

#### Battery Tester

|                                                  |                            |
|--------------------------------------------------|----------------------------|
| Sulfated battery check (SoH)                     | Enabling by ADELViewSystem |
| Short circuit Element Detection                  | Yes                        |
| Detection of element in short circuit            | Yes                        |
| Refresh Battery (must enabled Fast Charge)       | Every 288 hours            |
| State of Charge (SoC)                            | Yes                        |
| Low Battery Capacity warning                     | Yes                        |
| Threshold alarm Battery almost flat              | 21 – 22 Vdc batt           |
| LVD. (Protections against total Batt. discharge) | 19 – 20 Vdc batt           |
| Auto or manual test Mode                         | Yes                        |

|                     |     |
|---------------------|-----|
| Purification Charge | Yes |
|---------------------|-----|

#### Type of Signal Output Contact (dry switch contacts)

Dry Contact. Current can be switched (EN60947.4.1): Max: DC1: 30 Vdc 1 A; AC1: 60 Vac 1A (Resistive load ) Min: 1mA at 5 Vdc (Min permissive load)

|                            |   |    |    |
|----------------------------|---|----|----|
| Fault System / Low Battery | C | NC | NO |
| Main or Back Up            | C | NC | NO |
| Rectifier Fail             | C | NC | NO |

#### LED Indicator

|                        |        |
|------------------------|--------|
| Charging Mode          | Green  |
| Diagnosis              | Red    |
| Battery / System fault | Red    |
| Mains or Back Up       | Yellow |
| Rectifier fail         | Red    |

#### Acoustic signal

|                                  |                                 |
|----------------------------------|---------------------------------|
| Acoustic Buzzer selectable, for: | Find the device, Alarm features |
|----------------------------------|---------------------------------|

#### PC Shutdown or Device Shutdown

|                                                        |                                      |
|--------------------------------------------------------|--------------------------------------|
| PC Shutdown function to switch Off and On PC           | By ADELViewSystem and RJUSB280 Cable |
| Switch off device if Ethernet looses the communication | By setting the device.               |

#### UPS Disabling

|                          |                    |
|--------------------------|--------------------|
| Enabling / Disabling UPS | By outside contact |
|--------------------------|--------------------|

#### Communication Port: Input / Output (RJ45)

|                                           |                                                  |
|-------------------------------------------|--------------------------------------------------|
| Remote monitoring data Protocol Aux1 for: | Modbus RTU (RS485)<br>DPY351 or DPY353<br>RJTemp |
| Ethernet communication protocols Aux2:    | ModBus TCP/IP -<br>SNMP V3 - HTTPS               |
| ADELBus: for driving ADELSysInterface     | CAN Open                                         |

#### GUI

|                                                      |            |
|------------------------------------------------------|------------|
| GUI: Embedded web based accessed via Ethernet using: | Web Server |
|------------------------------------------------------|------------|

#### Device feature

|                                             |               |
|---------------------------------------------|---------------|
| User configurable Alarm                     | By Web Server |
| User configurable signals                   | By Web Server |
| Downloadable software and firmware upgrades |               |

#### LOG File


|                                      |                                                                                                                                                                                        |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Life time Battery statistic History: | N° of complete Charging, N° of aborted Charging, Tot. Ampere hours, Tot. Run Time, Highest Voltage, Lowest Voltage, N° Power Boost, Max. deep of discharge, Average deep of discharge, |
| Life time Device statistic History:  | N° of internal overtemperature event                                                                                                                                                   |
| Life time Input statistic History:   | N° of Time the Vac is lower than min. edge, N° of Time the Vac is higher than max. edge, N° of Back Up, Max. AC Voltage, Min AC Voltage.                                               |
| Life time Load statistic History:    | Highest Voltage on the Load Terminal, Lowest Voltage on the Load Terminal                                                                                                              |
| Alarm Battery Log:                   | Battery element shorted, Battery temperature, Bad cable connections, Low state of Health SoH, Revers battery connection, Temperature sensor disconnected.                              |
| Alarm Input Log:                     | Input Vac Lower then or Higher then...,                                                                                                                                                |
| Alarm Load Log:                      | Output in Short circuit, Output in overload.                                                                                                                                           |
| Notification                         | Email Alarm                                                                                                                                                                            |

#### Lifetime Expectancy

Life Time Expectancy defines the minimum life expectancy of the device in hours of operation. Being a device designed with electrolytic capacitors, the maximum duration is defined at 15

years - 131,400 h. Any value higher than this is to be considered only as a theoretical duration, calculated to be able to compare devices with each other.

| Ambient temp. | Out Power     | 115Vac  | 230Vac  |
|---------------|---------------|---------|---------|
| 25°C          | 24 Vdc - 10 A | 642640h | 883243h |
| 25°C          | 24 Vdc - 20 A | 158844h | 634203h |
| 40°C          | 24 Vdc - 10 A | 187139h | 292603h |
| 40°C          | 24 Vdc - 20 A | 25846h  | 182768h |

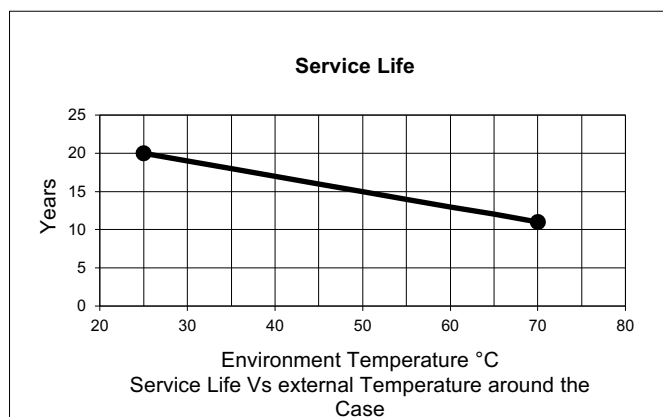

#### Accuracy Measurement

##### Accuracy on the Input side

|                                                                                           |                                |
|-------------------------------------------------------------------------------------------|--------------------------------|
| Measure of the Main Input voltage<br>at 47- 63Hz; $\pm 25^{\circ}\text{C}$ ; 90 – 305 Vac | $\pm 1\%$<br>of Full Scale Vac |
|-------------------------------------------------------------------------------------------|--------------------------------|

##### Accuracy on the output side

|                                                              |                                      |
|--------------------------------------------------------------|--------------------------------------|
| Measure of the Output voltage Load Side<br>Range: 10 - 33Vdc | $\pm 1.5\%$ of Full Scale<br>Vdc Out |
| Measure of the Output current Load Side<br>Range: 0 - 70A    | $\pm 1.5\%$ of Full Scale I<br>Out   |
| Measure of the Output voltage Battery Side<br>Range: 0 - 33V | $\pm 1.5\%$ of Full Scale<br>Vdc Out |
| Measure of the Output current Battery Side<br>Range: 0 - 30A | $\pm 1.5\%$ of Full Scale I<br>Out   |
| Temperature Probe<br>Range: -20 – 60°C                       | $\pm 2^{\circ}\text{C}$              |

#### Accessory

|                              |                                                                                                               |
|------------------------------|---------------------------------------------------------------------------------------------------------------|
| RJTEMP451N                   | Temperature Probe Length 1m.                                                                                  |
| RJTEMP453N                   | Temperature Probe Length 3m.                                                                                  |
| RJCONN45                     | Cable RJ45/RJ45 for Parallel Connection                                                                       |
| DPYCONN250                   | Cable RJ45/RJ45 for DPY351 connection                                                                         |
| RJ45COUPLER                  | RJ45 Three way "Daisy Chain" for Aux 2                                                                        |
| RJ45Tconnect                 | RJ45 Three way "Daisy Chain" for Aux 2 Cable                                                                  |
| RJUSB280-1                   | Cable RJ45/USB (Aux2) Length 1m for PC connection                                                             |
| RJTB280                      | Connector RJ45/Terminal Block 4pin for Aux 1 To RS485 ModBus RTU                                              |
| ADELViewsystem (Aux1 RTU485) | PC App for: Monitoring, Logging, Configuration, Control, Alarm, of the devices in ADELBus network.            |
| DPY351                       | HMI panel control for: Monitoring, Logging, Configuration, Control, Alarm, of the devices in ADELBus network. |
| DPY353                       | Display for: Monitoring the Battery state, Battery Charging Section, Fail Alarm.                              |