



Starlink Gen 3 DC Converter

SL-G3-250-57-DC-DC

Feature

- Wide DC input rang: 10-36Vdc
- 57Vdc output at 4.5A
- High powered output up to 250W
- 96% efficiency
- Waterproof construction
- Over current and voltage protection
- Operating temperatures: 20-80 degrees
- 1 year warranty

Applications

- RV, marine, vehicle, and off-grid applications




Specification

Part No.	Dimensions	Input Voltage	Output Voltage	Output Current	Max. Output Power	Current Accuracy	Power Factor
SL-G3-250-57-DC-DC	74*74*32mm	10-36Vdc	57Vdc	4.5A	250W	96%	

Parameters

Name	Specification
Size	74*74*32mm
Input	12/24V DC
Output	57V DC 4.5A
Operation Temperature	-20-80°C
Weight	275g
Protection	Overcurrent/Over voltage/ Waterproof
Warranty	1 year
Conversion Efficiency	96%
Application	Starlink gen3

Specifications

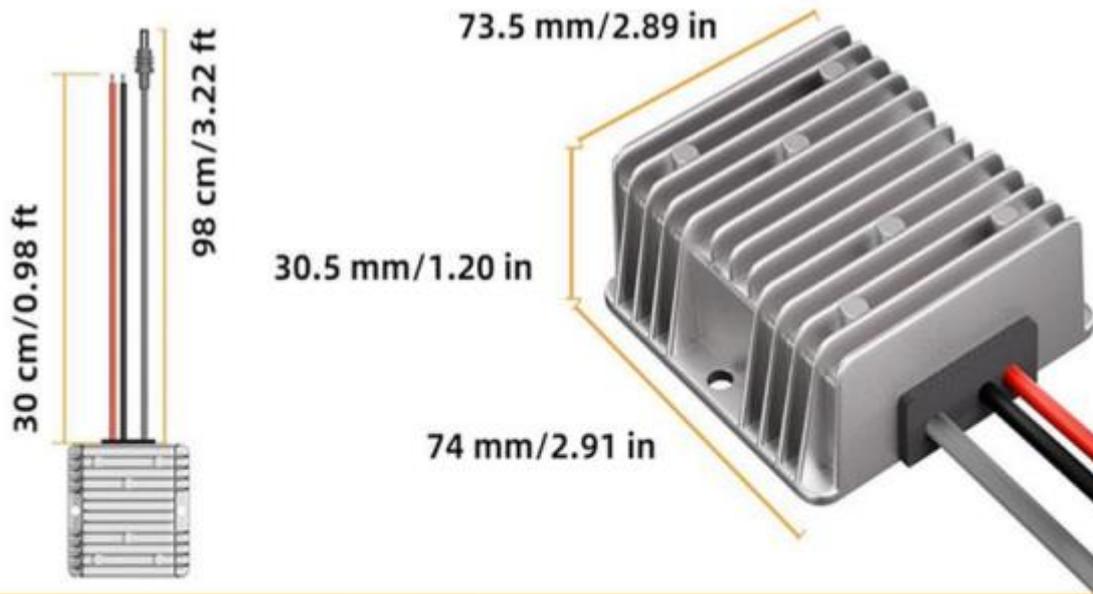

Document Revision

Revision	Description	Date	Author	Approver
1.1	Initial release	5 th Febuary 2026	Jesse Jankelowitz	Michael Xu