


■ Features :

- Half-brick size (2.28"X2.4"X0.5") with industry standard pin out
- 2:1 wide input range
- Protections: Short circuit / Over current / Over voltage / Over temperature
- High efficiency up to 89%
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in remote sense function
- Trimming output ±10%
- Five-sided shield metal case
- Optional heat sinks for extended operating temperature
- Output 3.3V/15V available
- Approvals: UL / CUL / EAC / CE / UKCA
- 3 years warranty

■ GTIN CODE

 MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

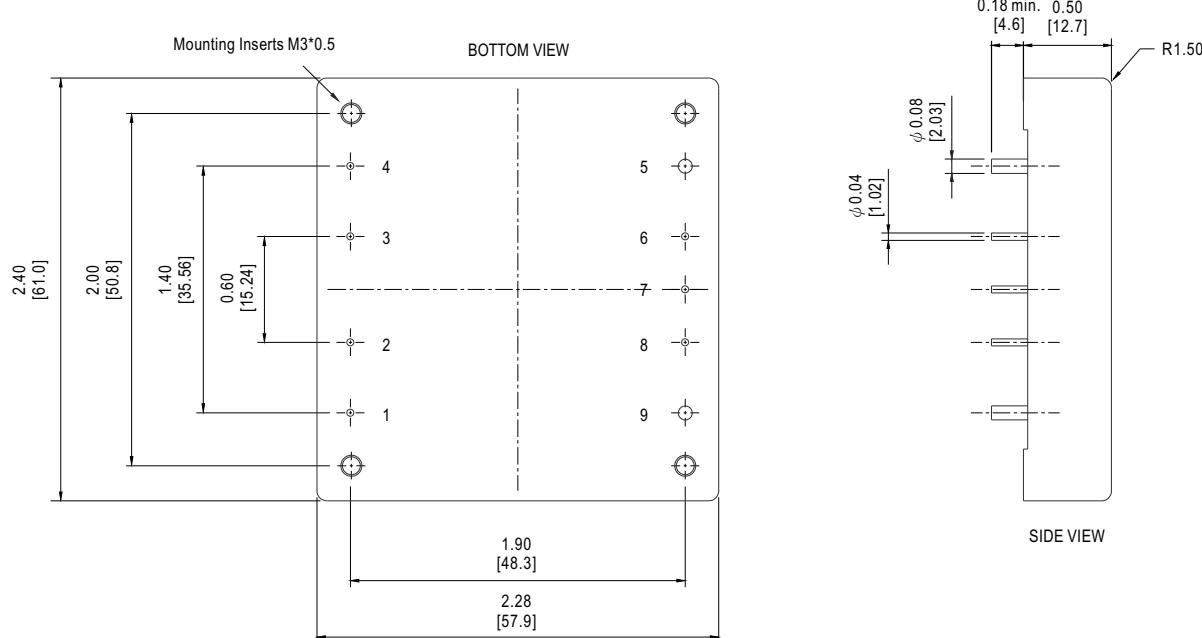
SPECIFICATION

MODEL	MHB150-48S05	MHB150-48S12	MHB150-48S24
OUTPUT	DC VOLTAGE	5V	12V
	CURRENT RANGE	0 ~ 30A	0 ~ 12.5A
	RATED POWER	150W	
	RIPPLE & NOISE (max.) Note.2	100mVp-p	150mVp-p
	VOLTAGE ACCURACY Note.3	±1.0%	
	LINE REGULATION	±0.2%	
	LOAD REGULATION	±0.2%	
	SWITCHING FREQUENCY (Typ.)	500KHz	
	EXTERNAL TRIM ADJ. RANGE (Typ.)	±10%	
	EXTERNAL CAPACITIVE LOAD (max.)	30000uF	12500uF
INPUT	RATED DC INPUT	48VDC	
	VOLTAGE RANGE	36 ~ 75VDC	
	SURGE VOLTAGE (100ms max.)	100VDC	
	UNDER VOLTAGE LOCKOUT	Power up: 34VDC, Power down: 32.5VDC	
	EFFICIENCY (Typ.)	86%	89%
	DC CURRENT	3.7A	3.6A
	NO LOAD	25mA	
PROTECTION	FILTER	Pi-network	
	OUTPUT OVER CURRENT	110 ~ 140% rated output power Protection type : Over current limiting, recovers automatically after fault condition is removed	
	OUTPUT OVER VOLTAGE (Typ.)	115 ~ 140% rated output voltage Protection type : Output voltage clamp	
	OUTPUT SHORT CIRCUIT	Protection type : Can be continuous, recovers automatically after fault condition is removed	
	OVER TEMPERATURE	100°C±5°C of case temperature	
FUNCTION OPERATING	REMOTE CONTROL	Please refer to "Remote ON/OFF Control" for details	
	OUTPUT TRIMMING	±10%, Please refer to "External Output Trimming" for details	
ENVIRONMENT	WORKING TEMPERATURE (Typ.)	-40 ~ +100°C ; Thermal shutdown at 100°C±5°C of case temperature (please refer to "Thermal Curve")	
	WORKING HUMIDITY	0% ~ 95% RH max.	
	STORAGE TEMP., HUMIDITY	-55 ~ +105°C, 0 ~ 95% RH	
	TEMP. COEFFICIENT	±0.03%/°C (0~60°C)	
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, EAC TP TC 004 approved	
	ISOLATION VOLTAGE	I/P-O/P:1500VDC, I/P-Case:1500VDC, O/P-Case:1500VDC	
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH	
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Class A with external components (please refer to "EMC Suggestion Circuit"), EAC TP TC 020	
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8; BS EN/EN55024, light industry level, criteria A, EAC TP TC 020	
OTHERS	CASE MATERIAL	Aluminum	
	MTBF	900K hrs typ. MIL-HDBK-217F (25°C)	
	DIMENSION	57.9*61*12.7mm (2.28"X2.4"X0.5") (L*W*H)	
	WEIGHT	100g	
NOTE	1. All parameters NOT specially mentioned are measured at 48VDC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 1uf ceramic & 10uf tantalum capacitor across output. 3. The power supply need to connect "+Vout" to "+R.S" and "-Vout" to "-R.S". 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx		

■ Mechanical Specification

Unit:inch[mm]

All Dimensions In Inches [mm]
 Tolerance Inches: X.XX= ± 0.02 , X.XXX= ± 0.010
 Millimeters: X.X= ± 0.5 , X.XX= ± 0.25



Pin No. Assignment

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment
1	+Vin	4	-Vin	7	Trim
2	R.C.	5	-Vout	8	+R.S.
3	Case	6	-R.S.	9	+Vout

■ Remote ON/OFF Control


The MHB150 series allow the user to switch the power ON and OFF electronically by their remote ON/OFF feature. The MHB150 series are available with "Positive Logic" (standard) or "Negative Logic" (option).

Logic table

Logic State(pin2)	Positive logic	Negative logic
Logic Low-Switch Closed	Power OFF(<0.8Vdc)	Power ON(<0.8Vdc)
Logic High-Switch Open	Power ON(Open circuit)	Power OFF(Open circuit)

Note: 1.Logic compatibility : R.C.(pin2) ~ -Vin(pin4).

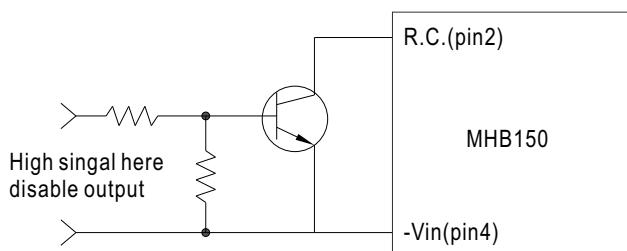2.Suffix "N" to the model number with Negative logic remote ON/OFF.



Example control circuit(positive logic)

External Output Trimming

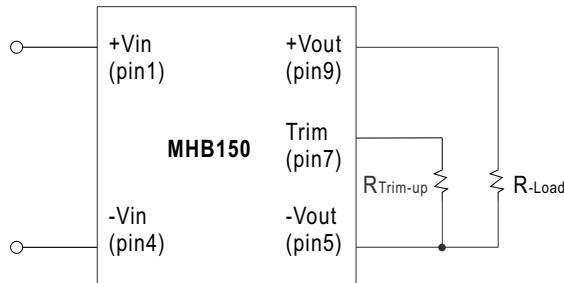


Figure 1 : Trim-up voltage setup

The value of $R_{\text{Trim-up}}$ defined as:

$$R_{\text{Trim-up}} = \frac{(R_1 - R_2 \times (V_o - V_{o, \text{nom}}))}{(V_{o, \text{nom}})} \text{ (K}\Omega\text{)}$$

Where: $R_{\text{Trim-up}}$ is the external resistor in Kohm.

$V_{o, \text{nom}}$ is the nominal output voltage.

V_o is the desired output voltage.

R_1 and R_2 are inside the unit and list in Table 1

Output Voltage(V)	R1 (Kohm)	R2 (Kohm)
5V	5.8	3.3
12V	18.945	4.636
24V	41.442	6.977

Table 1

For example, to Trim-up the output

voltage of 5.0V model (MHB150-48S05)

by 8% to 5.4V, $R_{\text{Trim-up}}$ is calculated

as follows:

$$V_o - V_{o, \text{nom}} = 5.4 - 5.0 = 0.4 \text{ V}$$

$$R_1 = 5.8 \text{ Kohm}$$

$$R_2 = 3.3 \text{ Kohm}$$

$$R_{\text{Trim-up}} = \frac{5.8 - 3.3 \times 0.4}{0.4} = 11.2 \text{ (K}\Omega\text{)}$$

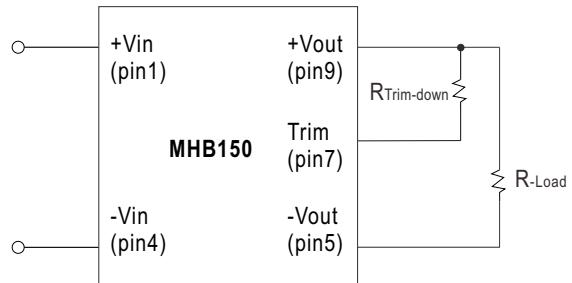


Figure 2 : Trim-down voltage setup

The value of $R_{\text{Trim-down}}$ defined as:

$$R_{\text{Trim-down}} = \frac{(R_1 - R_2 \times (V_{o, \text{nom}} - V_o))}{(V_{o, \text{nom}} - V_o)} \text{ (K}\Omega\text{)}$$

Where: $R_{\text{Trim-down}}$ is the external resistor in Kohm.

$V_{o, \text{nom}}$ is the nominal output voltage.

V_o is the desired output voltage.

R_1 and R_2 are inside the unit and list in Table 2.

Output Voltage(V)	R1 (Kohm)	R2 (Kohm)
5V	5.8	5.32
12V	86.45	60.1
24V	430	120

Table 2

For example, to Trim-down the output

voltage of 5.0V model (MHB150-48S05)

by 8% to 4.6V, $R_{\text{Trim-down}}$ is

calculated as follows :

$$V_{o, \text{nom}} - V_o = 5.0 - 4.6 = 0.4 \text{ V}$$

$$R_1 = 5.8 \text{ Kohm}$$

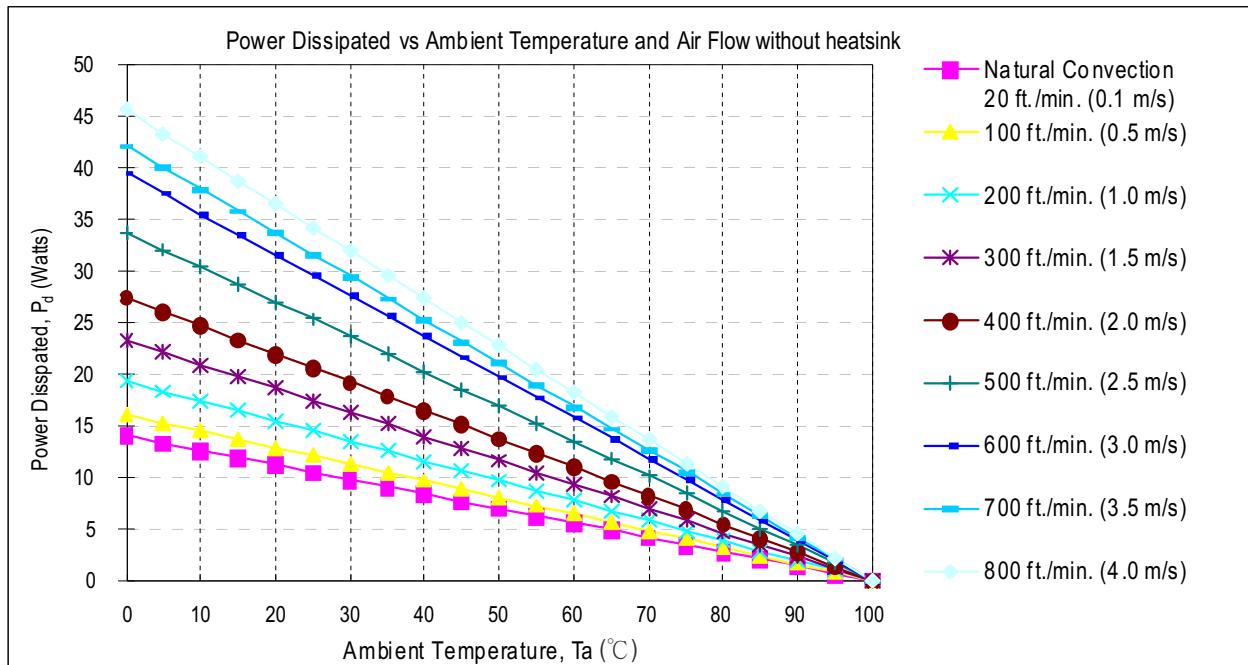
$$R_2 = 5.32 \text{ Kohm}$$

$$R_{\text{Trim-down}} = \frac{5.8 - 5.32 \times 0.4}{0.4} = 9.18 \text{ (K}\Omega\text{)}$$

■ Thermal Curve

The operating case temperature range of MHB-150 series is -40°C to +100°C. When operate the MHB-150 series, proper de-rating or cooling is needed.

The maximum case temperature under any operating condition should not be exceed 100°C. The following curve is the de-rating curve of MHB-150 series without heat sink.



Air Flow Rate	Typical Rca	Air Flow Rate	Typical Rca
Natural convection 20ft./min. (0.1m/s)	7.12°C/W	500 ft./min. (2.5m/s)	2.96°C/W
100 ft./min. (0.5m/s)	6.21°C/W	600 ft./min. (3.0m/s)	2.53°C/W
200 ft./min. (1.0m/s)	5.17°C/W	700 ft./min. (3.5m/s)	2.37°C/W
300 ft./min. (1.5m/s)	4.29°C/W	800 ft./min. (4.0m/s)	2.19°C/W
400 ft./min. (2.0m/s)	3.64°C/W		

Rca : Thermal resistance from case to ambience

Example:

What is the minimum airflow necessary for a MHB150-48S12 operates at nominal line, an output current of 12.5A, and a maximum ambient temperature of 40°C?

Solution:

Given: Vin=48Vdc, Vo=12Vdc, Io=12.5A, η (unit efficiency)=89%

Determine Power dissipation (P_d):

$$P_d = P_i - P_o = P_o(1 - \eta)/\eta$$

$$P_d = 12 \times 12.5 \times (1 - 0.89)/0.89 = 18.54 \text{ Watts}$$

Determine airflow:

$$\text{Given: } P_d = 18.54 \text{ W and } T_a = 40^\circ\text{C}$$

Check Thermal Curve above:

minimum airflow = 500 ft./min.

Verifying: The maximum temperature rise $\Delta T = P_d \times Rca = 18.54 \times 2.96 = 54.88^\circ\text{C}$

The maximum case temperature $T_c = T_a + \Delta T = 94.88^\circ\text{C} < 100^\circ\text{C}$

Where: The Rca is thermal resistance from case to ambience.

The Ta is ambient temperature and the Tc is case temperature.

Case Heat Sink (Optional)

Unit:mm

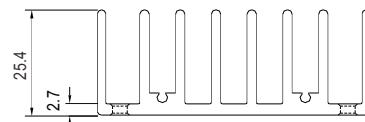


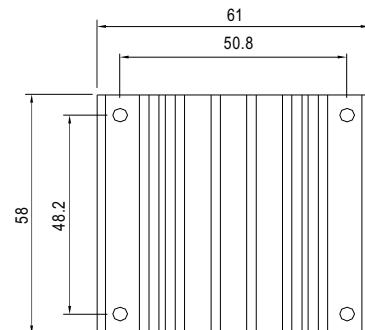
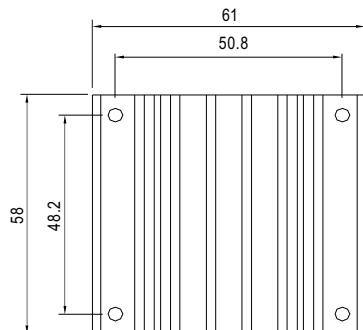
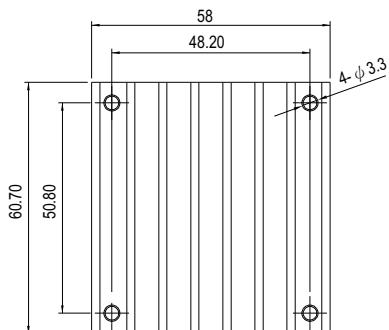
Model No.: M-C308 (Vertical Fins)



Model No.: M-C091(Horizontal Fins)



Model No.: M-C092 (Horizontal Fins)


R_{ca}:

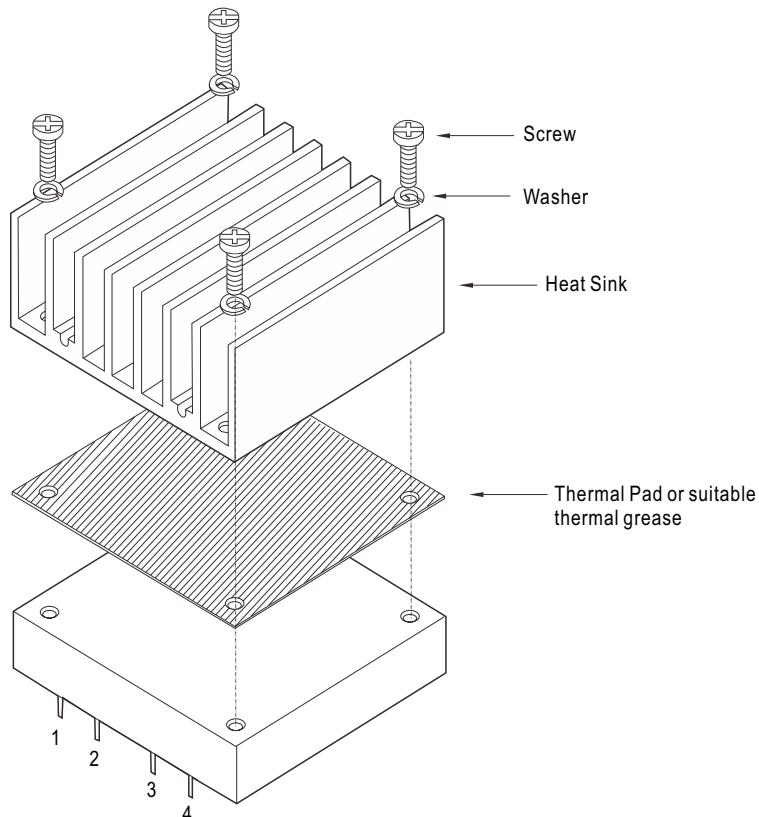
3.90°C/W (typ.), at natural convection
1.74°C/W (typ.), at 100ft./min.(LFM)
1.33°C/W (typ.), at 200ft./min.(LFM)
1.12°C/W (typ.), at 300ft./min.(LFM)
0.97°C/W (typ.), at 400ft./min.(LFM)

R_{ca}:

4.70°C/W (typ.), at natural convection
2.89°C/W (typ.), at 100ft./min.(LFM)
2.30°C/W (typ.), at 200ft./min.(LFM)
1.88°C/W (typ.), at 300ft./min.(LFM)
1.59°C/W (typ.), at 400ft./min.(LFM)

R_{ca}:

3.00°C/W (typ.), at natural convection
1.44°C/W (typ.), at 100ft./min.(LFM)
1.17°C/W (typ.), at 200ft./min.(LFM)
1.04°C/W (typ.), at 300ft./min.(LFM)
0.95°C/W (typ.), at 400ft./min.(LFM)

■ Heatsink Assembly


Heat Sink Order No.:

M-C308

M-C091

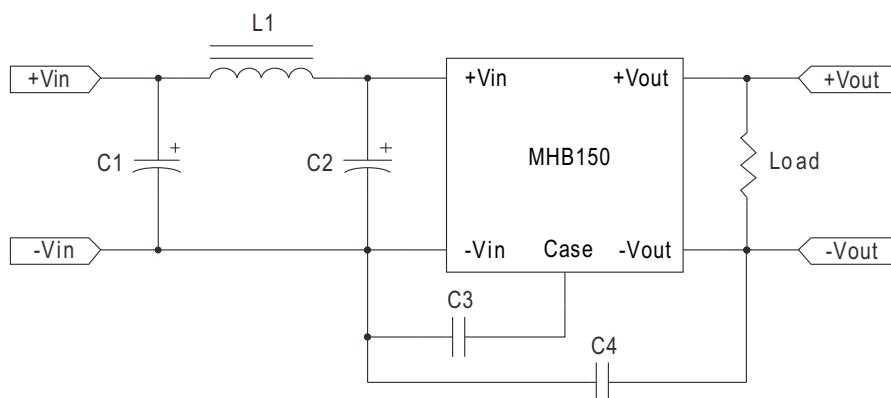
M-C092

Thermal Pad: 56.9x60x0.25mm

Screw: SMP+SW M3x8L

■ EMC Suggestion Circuit

※ Required external components to meet BS EN/EN55032 class A conducted emission are as below:



Model No.	C1	C2	C3	C4	L1
MHB150-48S□	47uF/100V ESR<0.17Ω	47uF/100V ESR<0.17Ω	1000pF	1000pF	3.4uH

□=05,12,24

Packing

Standard Packing	MPQ (PCS)	One EPE G.W.	Max. Q'TY/ Carton(PCS)	One Carton G.W.
<p>Unit : mm</p> <p>The diagram illustrates the standard packing configuration. It shows a top-down view of the converter unit resting on a stack of antistatic foam pieces. A callout shows a single converter unit placed on a single foam piece. Below this, a larger stack of converters is shown, each individually wrapped in a pink antistatic foam tray. The entire assembly is shown within a white shipping carton. Dimension lines indicate the height (H), width (W), and depth (L) of the carton. Text at the bottom specifies the carton dimensions as L284.8 x W175.7 x H390.9.</p>	12	1.14Kg	60	7.2Kg

Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>